




Power units series T.B.

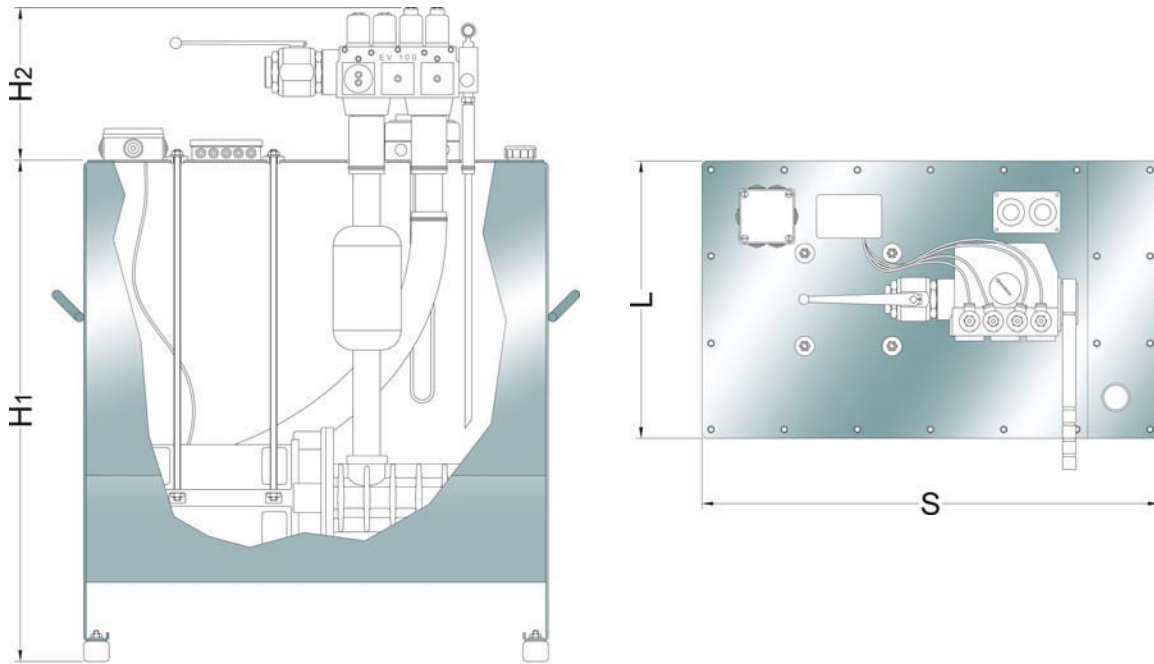

TYPE	T.B.							
	70	130	180	250	350	450	600	750

DIMENSIONS (mm)

L	385	445	490	525	565	605	725	725
S	710	760	760	810	910	1010	1060	1260
H ₁	520	610	710	760	860	960	1100	1100
H ₂ (max)	230	280	280	280	320	320	320	320

TYPE	T.B.							
	70	130	180	250	350	450	600	750

TECHNICAL CHARACTERISTICS

Total volume (lt)	114	175	236	302	406	509	688	819
Usable volume (lt)	73	131	190	252	351	451	623	747
Max. power (kw)	11.0	18.4	22.0	36.8	51.5	51.5	51.5	73.5
Max. supply (lpm)	125	380	380	500	800	800	1200	1200
Flow valves	EV 100 : , ³ / ₄ ,1 ½ ,2 ½							
	KV ½ : ,1P ,1S ,2P ,2S							

Type T.B. for elevators with high speed comfort and silence

- Dual speed Maximum speed 1 m/sec
- Tapped pump
- Submersible motor
- Overheat protection thermostat
- Oil heater